


NIGROSIN WLF

General properties	Neutral black dyestuff for ink, polishes and other applications The liquid form is available as Nigrosin W liquid
Color Index Part I	Acid Black 2
Color Index Part II	50420
Chemical class	Sulfonated Phenazine
Appearance	Black powder
Surface tension	> 50 mN/m
Color strength tolerance	± 5%
pH (10% in water)	10.0 – 12.0
Lightfastness	3
Solubility (g/L at 25 °C)	Water ____100
Applications	Water-based inks Office supplies Polishes Wood stains Aqueous resins (Urea formaldehyde, melamine, formaldehyde, phenol formaldehyde)
Stability	Storage stability: 24 months from delivery ex plant.



Absorbance curve

Nigrosin WLF in water

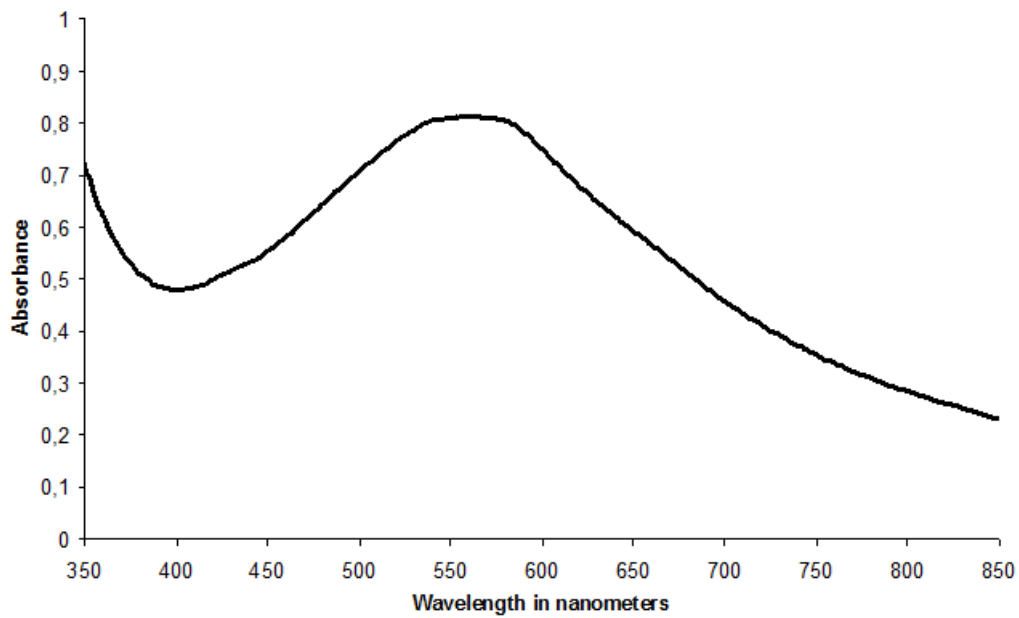

This information and our technical advice - whether verbal, in writing or by way of trials - are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to verify the information currently provided - especially that contained in our safety data and technical information sheets - and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with the current version of our General Conditions of Sale and Delivery.



LANXESS Deutschland GmbH
Business Unit Rhein Chemie Additives
Kennedyplatz 1
50569 Cologne, Germany
<http://rch.lanxess.com>

